

MULTI-LAYERED SPHERICAL MAGNETIC SHIELDING

Branislav Kuzmanovic — Zoran Baus — Srete Nikolovski *

Carefully planned magnetic shielding can protect objects and beings from the influence of magnetic fields in the whole frequency spectrum. In the paper it is shown that the most efficient magnetic shielding can be performed by a sphere of more ferromagnetic layers with non-magnetic material in between, which reduces the quantity of ferromagnetic material to minimum.

Key words: electromagnetic fields, ferromagnetics, shielding

1 INTRODUCTION

Lots of electromagnetic equipment generate strong magnetic fields in the environment. Therefore, it is often necessary to protect electrical appliances as well as human beings from such strong fields [1].

The efficient electromagnetic shielding is performed by placing a conductive material of certain thickness around the object that has to be protected. The shield thickness depends on the frequency of the electromagnetic energy and on the conductivity of its material. Appropriate magnetic shielding is achieved exclusively by ferromagnetic materials. Not only diverse electrical appliances but also human beings have to be protected when exposed to very strong magnetic fields. The most efficient protection can be ensured by a spherical shape but also using some other closed surfaces.

Exact solution of a ferromagnetic sphere in a homogeneous magnetic field is calculated in [2] and that of an ellipsoid and cylinder in [3]. The solutions are based on the Laplace equation $\nabla^2\varphi = 0$, where φ is the scalar magnetic potential.

The ferromagnetic sphere in a homogeneous magnetic field H_0 behaves like a magnetic dipole [4]. The sphere divides the space in two parts, each with their own permeability μ_1 and μ_2 (Fig. 1).

Magnetic field inside the sphere ($0 < r < r_1$) is also homogeneous and less than H_0 , actually it is $H_0 + H_i$. The scalar magnetic potential can be written

$$\varphi_1 = -(H_0 + H_1)r \cos \vartheta. \quad (1)$$

The magnetic scalar potential for the outer space ($r > r_1$) can be written on the basis of the analytical solution as

$$\varphi_2 = -H_0r \cos \vartheta + \frac{p \cos \vartheta}{4\pi\mu_2r^2} \quad (2)$$

where p is a dipole magnetic moment of a magnetic sphere, taken analogously to a dielectric sphere

$$p = \frac{\mu_1 - \mu_2}{\mu_1 + 2\mu_2} 4\pi r^3 H_0. \quad (3)$$

Direction of a homogeneous magnetic field H_0 is the direction of the dipole magnetic moment.

The exact solution of a hollow ferromagnetic sphere in a homogeneous magnetic field is given in [3, 2]. Of course, if the approach with the dipoles is applied, it will result in the same solution. The protection factor of other closed objects can be calculated.

The hollow magnetic sphere divides the space with its shells in three parts, with permeabilities μ_1 , μ_2 and μ_3 (Fig. 2). The hollow sphere consists of two concentric layers; its behaviour can be seen as a superposition of the two adjacent layers. This means that the both spheres become dipoles, when influenced by the outer magnetic field. Their dipole moments are p_1 and p_2 . So, in the area 1, with $r < r_1$, the homogeneous magnetic field has the value of $H_0 + H_1 + H_2$; in the area 2, where $r_1 < r < r_2$ the magnetic field is $H_0 + H_2$ with superposition of the field of the dipoles p_x of the inner sphere. In area 3, where $r > r_2$, the field is the sum of the homogeneous field H_0 and the fields of the dipoles p_i and p_o of the two spheres.

Scalar magnetic potentials for the three areas are given as follows

$$\varphi_1 = -(H_0 + H_1 + H_2)r \cos \vartheta, \quad r \leq r_1, \quad (4a)$$

$$\varphi_2 = -(H_0 + H_2)r \cos \vartheta + \frac{p_1 \cos \vartheta}{4\pi\mu_3r^2}, \quad r_1 \leq r \leq r_2, \quad (4b)$$

$$\varphi_3 = -H_0r \cos \vartheta + \frac{(p_1 + p_2) \cos \vartheta}{4\pi\mu_3r^2}, \quad r \geq r_2. \quad (4c)$$

In order to determine the assumed quantities H_1 , H_2 , p_1 and p_2 , the boundary conditions valid on $r = r_1$

* Power System Department, Faculty of Electrical Engineering, J.J. Strossmayer University of Osijek, K. Trpimira 2B, 31 000 Osijek, Croatia; srete@etfos.hr

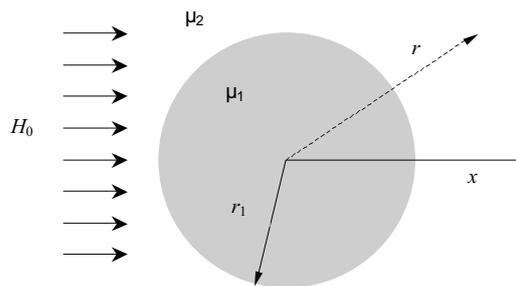


Fig. 1. Multilayered ferromagnetic sphere in a homogenous magnetic field H_0

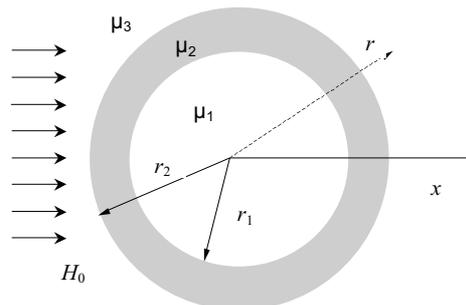


Fig. 2. Hollow ferromagnetic sphere in a homogenous magnetic field H_0

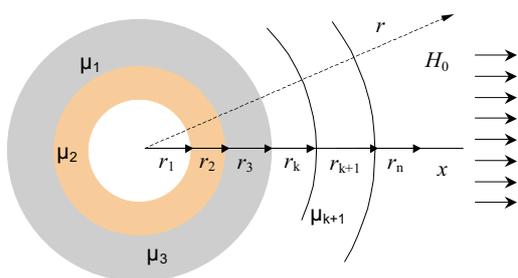


Fig. 3. Multilayered ferromagnetic sphere in a homogenous magnetic field H_0

and $r = r_2$ have to be enforced. The chosen boundary conditions refer to the equality of the normal components of the magnetic induction ($\mathbf{n} \cdot \mu \cdot \partial\varphi/\partial r$), as well as of the tangential components of the magnetic field ($\partial\varphi/\partial r$) on the two sides of the boundary.

Thus, the unknown quantities of H_1 , H_2 , p_1 and p_2 are given

$$H_1 = 3H_0 \left(\frac{r_2}{r_1}\right)^3 \frac{\mu_3(\mu_2 - \mu_1)}{D}, \tag{5a}$$

$$H_2 = -H_0 \frac{(\mu_2 - \mu_3) \left[\left(\frac{r_2}{r_1}\right)^3 (\mu_1 + 2\mu_2) - 2(\mu_2 + \mu_1) \right]}{D} \tag{5b}$$

where D is

$$D = \left(\frac{r_2}{r_1}\right)^3 (\mu_1 + 2\mu_2)(\mu_2 + 2\mu_3) - 2(\mu_2 - \mu_1)(\mu_1 - \mu_3)$$

and V_2 is the outer sphere volume

$$V_2 = \frac{4\pi}{3} r_2^3. \tag{6}$$

If we let $r_1 \rightarrow 0$, ie that the inner sphere disappears, then the result for a single sphere is obtained.

2 MULTILAYERED FERROMAGNETIC SPHERE IN A HOMOGENEOUS MAGNETIC FIELD

It will be shown that the most efficient protection from the magnetic fields is the layered shielding. The

efficiency of the protection is proven by an application of multilayered concentric spheres (Fig. 3). Sphere shells 1, 2, 3, ..., n represent boundaries between ferromagnetic layers. Outer homogeneous magnetic field H_0 polarizes the concentric spheres so that they begin to behave like magnetic dipoles. As it is already shown by equation (4), the field in the boundary sphere consists of a homogeneous field as well as of a dipole field of all the spheres that are inside the observed sphere.

For example, in the k -th layer the total field is a sum of a homogeneous field H_0 and of homogeneous fields of all the k -th to n -th spheres, as well as of the dipole fields of all the inner spheres (from 1 to $(k-1)$). Therefore, the scalar potential of the k -th layer can be written as

$$\varphi_k = -\left(H_0 + \sum_{i=k}^n H_i\right)r \cos\vartheta + \frac{\sum_{i=1}^{k-1} p_i}{4\pi\mu_k r^2} \cos\vartheta, \tag{7}$$

$r_{k-1} \leq r \leq r_k.$

Let the permeabilities of the layers be different, having indices of the outer boundary sphere. The equation (7) is valid for all the layers from 1 to n , as well as for the space beyond the n -th layer. The unknowns are magnetic fields H_i and dipoles p_i (for $i = 1, \dots, n$).

In order to determine $2n$ unknowns, it is necessary to solve $2n$ equations, which are given from the boundary conditions at all n boundaries

$$\frac{\partial\varphi_k}{r\partial\vartheta} = \frac{\partial\varphi_{k+1}}{r\partial\vartheta}, \tag{8a}$$

$$\mu_k \frac{\partial\varphi_k}{r\partial\vartheta} = \mu_{k+1} \frac{\partial\varphi_{k+1}}{r\partial\vartheta} \tag{8b}$$

with $r = r_k$.

The $2n$ linear equations thus obtained can be written in the matrix form [5]

$$\begin{bmatrix} A & B \\ \tilde{B} & C \end{bmatrix} \begin{bmatrix} H \\ p \end{bmatrix} = -H_0 \begin{bmatrix} 0 \\ 1 \end{bmatrix}. \tag{9}$$

The matrices $A = |a_k|_n^n$ and $C = |c_k|_n^n$ are diagonal matrices of the n -th order with diagonal terms

$$a_{kk} = \frac{3V_k\mu_k\mu_{k+1}}{\mu_k - \mu_{k+1}}, \tag{10}$$

$$c_{kk} = \frac{-2}{3V_k(\mu_k - \mu_{k+1})} \tag{11}$$

where V_k is a volume of the k -th sphere, permeability of the layer in the k -th sphere and μ_{k+1} permeability of the layer out of the k -th sphere.

Matrix B is also a triangular matrix of the n -th order with terms

$$b_{kk} = \frac{\mu_k}{\mu_k - \mu_{k+1}}, b_{jk} = \begin{cases} 1 & (\forall j < k), \\ 0 & (\forall j > k). \end{cases} \quad (12)$$

Matrix \tilde{B} is a transposed matrix B . Matrices $H = |H_k|_n^1$; $p = |p_k|_n^1$; $\mathbf{1} = |\mathbf{1}_k|_n^1$; $\mathbf{0} = |0_k|_n^1$ are vectors with n components. The elements of vectors H and p are unknown homogeneous magnetic fields (H_i) and unknowns magnetic dipoles (p_i). By solving equation (9) the following is given

$$p = -B^{-1}AH, \quad (13)$$

$$SH = -H_0\mathbf{1} \quad (14)$$

where

$$S = B - CB^{-1}A \quad (15)$$

the auxiliary quadratic matrix of n -th order

$$s_{kk} = \frac{\mu_k + 2\mu_{k+1}}{\mu_k - \mu_{k+1}}, s_{jk} = \begin{cases} 1 & (\forall j < k), \\ -\frac{2V_k}{V_j} & (\forall j > k), \end{cases} \quad (16)$$

V_k and V_i are sphere volumes.

The unknown quantities of the field and dipoles are calculated by solving equations (13) and (14). The magnetic field protection factor is defined as a ratio of the homogeneous field inside the sphere and outer homogeneous field H_0

$$Z = H_0 + \sum_i i = 1^n \frac{H_i}{H_0}. \quad (17)$$

The inner space is the one that has to be protected from the outer strong magnetic field H_0 .

3 FERROMAGNETIC LAYERED SPHERE

The layered sphere consists of more concentric ferromagnetic spherical layers with air in between. Air is also inside the first and outside the last layer. It is assumed that the relative permeability of all the ferromagnetic layers is the same and very large ($\mu' \gg 1$). in this case the equations can be simplified because for the odd-layered spheres ($k = 1, 3, 5, \dots, 2n - 1$) permeability $\mu_k = \mu_0$, and for all the even layered ($k = 2, 4, 6, \dots, 2n$) the permeability is $\mu_k = \mu' \mu_0$. Thus, the diagonal members of the S -matrix (16) are

$$s_{kk} = \begin{cases} \frac{1+2\mu_k}{1-\mu} & (k = 1, 3, 5, \dots, 2n - 1) \\ \frac{\mu+2}{\mu-1} & (k = 1, 3, 5, \dots, 2n - 1) \end{cases} \quad (18)$$

with unchanged other members (s_{jk}) of matrix (16). For example, in the case of one ferromagnetic layer, there are two boundary spheres V_1 ; and V_2 , so equation (14) can be written as

$$\begin{bmatrix} \frac{1+2\mu'}{1-\mu'} & 1 \\ -\frac{2V}{V_2} & \frac{\mu'+2}{\mu'-1} \end{bmatrix} \begin{bmatrix} H_1 \\ H_2 \end{bmatrix} = -H_0 \begin{bmatrix} 1 \\ 1 \end{bmatrix}. \quad (19)$$

By combining (19) and (17) with the condition $\mu' \gg 1$, the magnetic protection factor for the sphere (eq. 17) with one ferromagnetic layer is given

$$Z_1 = \frac{0}{2\mu'} \frac{1}{1 - (V_1/V_2)}. \quad (20)$$

A sphere with two ferromagnetic layers of the same material has four boundary spheres, so its S matrix is:

$$S = \begin{bmatrix} \frac{1+2\mu'}{1-\mu'} & 1 & 1 & 1 \\ -\frac{2V}{V_2} & \frac{\mu'+2}{\mu'-1} & 1 & 1 \\ -\frac{2V}{V_3} & -\frac{2V}{V_3} & \frac{1+2\mu'}{1-\mu'} & 1 \\ -\frac{2V_1}{V_4} & -\frac{2V_2}{V_4} & -\frac{2V_3}{V_4} & \frac{\mu'+2}{\mu'-1} \end{bmatrix}. \quad (21)$$

The protection factor for the two ferromagnetic layers can be calculated in the same way as before, with the same condition $\mu' \gg 1$

$$Z_2 = \left(\frac{9}{2\mu'}\right)^2 \frac{1}{\left(1 - \frac{V_1}{V_2}\right)\left(1 - \frac{V_2}{V_3}\right)\left(1 - \frac{V_3}{V_4}\right)} \quad (22)$$

From (22) it can be seen that the efficient magnetic protection can be performed by ferromagnetic materials of a high relative permeability'. Also, it is obvious that the layers thicknesses influence the protection. If the magnetic protection in the hollow one-layered sphere should be improved, then the new ferromagnetic layers with air in between should be added. If the same ratio of the neighbouring spheres radii is assumed

$$\frac{r_1}{r_2} = \frac{r_2}{r_3} = \frac{r_3}{r_4} \text{tag}23$$

then the protection factor can be written as

$$Z_2 = \left(\frac{9}{2\mu'}\right)^2 \frac{1}{k^3} \quad (24)$$

with the k as a ratio constant

$$k = 1 = 1 - \frac{V_1}{V_2} = 1 - \frac{V_2}{V_3} = 1 - \frac{V_3}{V_4}. \quad (25)$$

For example, if the outer field in a sphere with radius $r_1 = 250$ mm should be decreased to 1% of its value by a ferromagnetic material of a relative permeability $\mu' = 1000$, one-layered sphere of a thickness $d_1 = 55$ mm is needed. The layer thickness, which implies amount of material, could be smaller by taking ferromagnetic material of a higher permeability. Also, reduction of a material

can be achieved by a two-layered ferromagnetic spheres. For the same protection factor and for the same material with the assumption (23), the ratio constant $k = 0.1266$. The total thickness of the both membranes is 24.2 mm, instead of 55 mm and the volume of the used magnetic material is 2.43 times less than in the first case.

Ferromagnetic materials are also very applicable for the electromagnetic fields protection at higher frequencies, because the penetration depth is decreasing with increasing relative permeability μ' . Thus, for the required relative permeability $jT = 1000$, radius $r_1 = 250$ mm and electric conductivity $a = 1.5 \times 10^4$ S/m the penetration depth at frequency of 50 Hz is 1.83 mm. If the same field should be decreased to 1% of its value, the ferromagnetic material thickness should be around 8.4 mm.

4 CONCLUSIONS

Magnetic shields are used for the protection of some electrical appliances and human beings from the strong magnetic fields. One of the most efficient object protections is achieved by shields shaped like a sphere. The recommended sphere consists of several ferromagnetic layers made from highly permeable magnetic materials. Combination of ferromagnetic and air (non-magnetic) layers can reduce magnetic fields inside the sphere, as required. If a ferromagnetic material is insufficiently permeable, this deficiency can be avoided by several ferromagnetic layers. It is shown through a calculus that in order to achieve the same degree of protection factor, the expense of needed ferromagnetic material is considerably less for two layers. The magnetic shields are also more efficient at higher frequencies because the penetration depth is decreasing with increasing permeability.

The protection can be also performed by other closed shapes or surfaces, not only sphere, but all the three dimensions should be equal related to the sphere diameter.

REFERENCES

- [1] KAISER, K. L.: Electromagnetic Shielding, CRC Press, Boca Raton, 2005.
- [2] JACKSON, J. D.: Classical Electrodynamics, John Wiley & Sons, New York, 1998.
- [3] STRATTON, J. A.: Electromagnetic Theory, McGraw-Hill, New York, 1941.
- [4] KADEN, H.: Wirbelströme und Schirmung in der Nachrichtentechnik, Springer, Berlin, 2006.
- [5] KREYSZIG, E.: Advanced Engineering Mathematics, John Wiley & Sons, New York, 1999.

Received 18 June 2008

Branislav Kuzmanovic (DSc El Eng) was born in 1937 in Pozega, Croatia. He received the BSc, MSc, and PhD degrees from the Faculty of Electrical Engineering and Computing, University of Zagreb, Croatia. Since 1983 he is a Full Professor at the Technical Military Academy in Zagreb, where he teaches in several electrotechnical courses: Theoretical Electrotechnics, Electrotechnics in Energy and Basics of Electrotechnics. His major field of interest is electromagnetic compatibility. Since 1992 he teaches at The Polytechnic University of Zagreb. He is an author of several journal and conference papers

Zoran Baus Zoran Baus (PhD), was born in Pozarevac on June 15, 1951. He obtained his BSc degree (1975), MSc degree (1987), in electrical engineering and his PhD degree from the Faculty of Electrical and Computing Engineering, Zagreb, Croatia in 2004. His major fields of interest include Intelligent Control (fuzzy control and optimization) and Power System Analysis. Presently, he is Assistant professor Power System Department at Faculty of Electrical Engineering, J.J. Strossmayer University in Osijek, Croatia.

Srete Nikolovski (PhD), (PhD), (M'1995, SM'2005) was born in Belgrade on October 1, 1954. He obtained his BSc degree (1978) and MSc degree (1989), in electrical engineering at the Faculty of Electrical Engineering, University of Belgrade and his PhD degree from the Faculty of Electrical and Computing Engineering, University of Zagreb, Croatia in 1993. Currently he is a Full Professor at Power System Department at Faculty of Electrical Engineering, J.J. Strossmayer University in Osijek, Croatia. His main interests are power system modelling, simulation and reliability analysis. He has published over 100 conference and journal papers. He is a Senior Member of IEEE Reliability Society, IEEE PES Society, EMC Society and Croatian National Committee of CIGRE.



EXPORT - IMPORT
of periodicals and of non-periodically
printed matters, books and CD-ROMs

Krupinská 4 PO BOX 152, 852 99 Bratislava 5, Slovakia
tel: ++421 2 638 39 472-3, fax: ++421 2 63 839 485
info@slovart-gtg.sk; <http://www.slovart-gtg.sk>

